
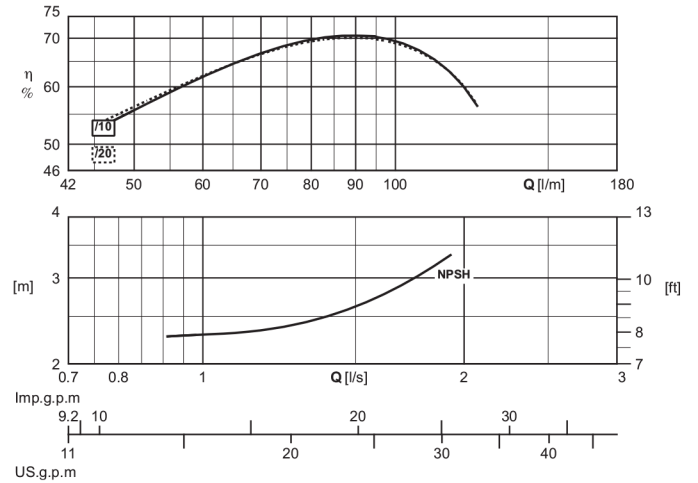


Type Type Tipo	Ø max	Weight Poids Peso	A	B	C	D	E	F
			[mm]					
E4XED35/5+MC4075	98	11,3	669,5	329,5	340	93	96	G1 1/4
E4XED35/7+MC41	98	12,5	729,5	389,5	340	93	96	G1 1/4
E4XED35/10+MCH415	98	14,5	899,5	479,5	420	93	96	G1 1/4
E4XED35/14+MCH42	98	16	1046,5	599,5	447	93	96	G1 1/4
E4XED35/20+MCH43	98	19,2	1254,5	779,5	475	93	96	G1 1/4
E4XED35/27+MCH44	98	23,2	1504,5	989,5	515	93	96	G1 1/4

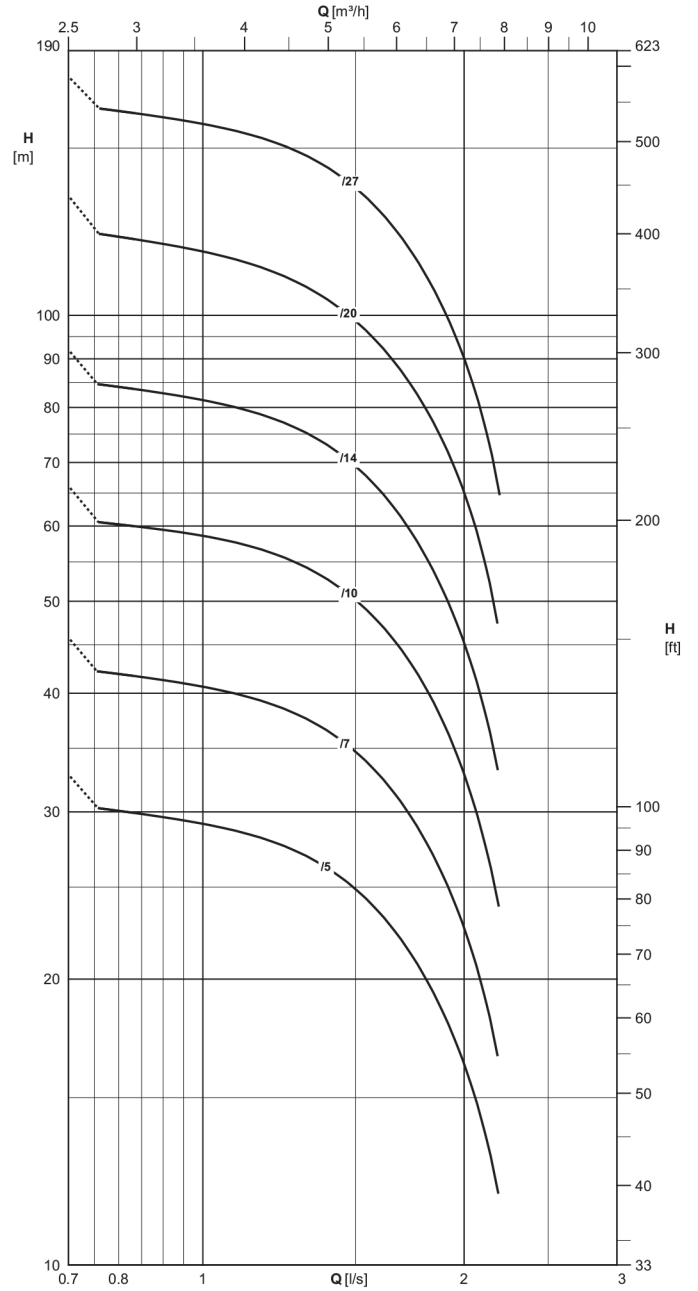

The hydraulic performance characteristics are guaranteed as conforming to standard UNI/ISO 9906 Grade 3B.

Les caractéristiques hydrauliques de fonctionnement sont garanties conformes à la norme UNI/ISO 9906 Niveau 3B.

Le caratteristiche di funzionamento vengono garantite secondo la norma: UNI/ISO 9906 Grado 3B.